


10A-1 / A50 BASE CHAIN

GUIDED ON SADDLE - STANDARD

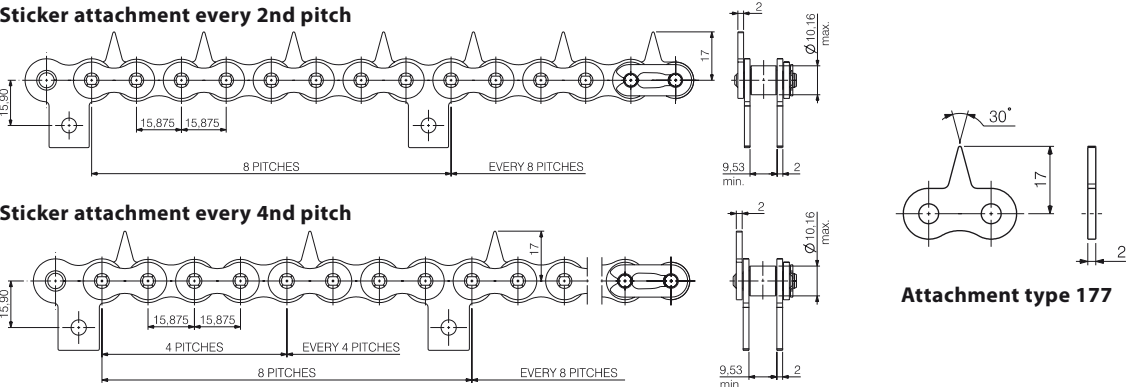


Attachment type 177

BROWN style

REGINA ref.	ISO ref.	CHAIN PITCH P		ROLLER DIAMETER Dr		INSIDE WIDTH W		SPIKE ATTACHMENT TYPE	SPIKE ATTACHMENT FREQUENCY
		mm	inches	mm	inches	mm	inches		
A50SR/P001	10A-1	15,875	5/8	10,16	0,400	9,65	0,380	177	every 2nd pitch
A50SR/031	10A-1	15,875	5/8	10,16	0,400	9,65	0,380	177	every 4nd pitch


GUIDED ON SADDLE - COINED

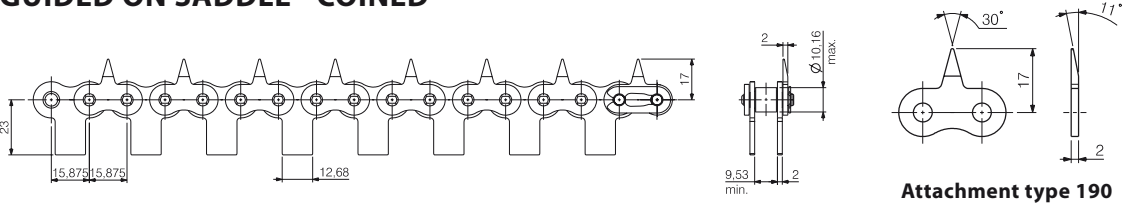

Attachment type 190

REGINA ref.	ISO ref.	CHAIN PITCH P		ROLLER DIAMETER Dr		INSIDE WIDTH W		SPIKE ATTACHMENT TYPE	SPIKE ATTACHMENT FREQUENCY
		mm	inches	mm	inches	mm	inches		
A50/FF	10A-1	15,875	5/8	10,16	0,400	9,65	0,380	190	every 2nd link

GUIDED ON EXTENDED PIN - COINED

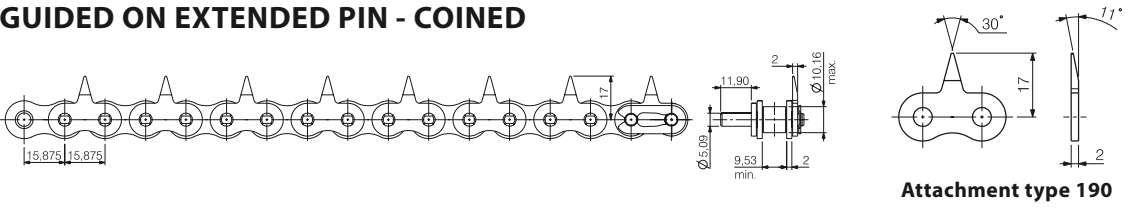

Attachment type 190

REGINA ref.	ISO ref.	CHAIN PITCH P		ROLLER DIAMETER Dr		INSIDE WIDTH W		SPIKE ATTACHMENT TYPE	SPIKE ATTACHMENT FREQUENCY
		mm	inches	mm	inches	mm	inches		
A50/P005	10A-1	15,875	5/8	10,16	0,400	9,65	0,380	190	every 2nd link



ILLIG® is a registered trademark of ILLIG Maschinenbaum GmbH
TFT® is a registered trademark of WM Wrapping Machinery SA
OMV® is a registered trademark of OMV Machinery Srl
Kiefel® is a registered trademark of Kiefel GmbH



Gabler® is a registered trademark of Gabler Thermoform GmbH
Irwin® is a registered trademark of Irwin Research and Development Inc
Dinieper® is a registered trademark of Dinieper Ind. Metalurgica
Brown® is a registered trademark of Brown Machine LLC

ITALY

REGINA CATENE CALIBRATE S.p.A.
HEAD OFFICE:
Via Monza, 90
23870 Cernusco Lombardone (LC) - Italy
Tel. +39 039 99801
Fax +39 039 9905229
sales@reginachain.net

USA

REGINA USA, INC.
305 E. Mahn Court
Oak Creek, WI 53154 - USA
Tel. 001 414 5710032
Fax 001 414 5710225
sales.us@reginachain.net

FRANCE

REGINA INDUSTRIE S.a.r.l.
Z.A.C. des Chatelliers
34 Rue des Frères Lumière
45800 Saint Jean De Braye - France
Tel. +33 238 836363
Fax +33 238 836413
sales.fr@reginachain.net

MEXICO

REGINA de MEXICO S.A. de C.V.
Av. Aviación 5051-28
Col. San Juan de Ocotán
45019 Zapopan, Jalisco - Mexico
Tel. +52 33 3627 4043
Fax +52 33 3627 3930
sales.mx@reginachain.net

CHINA

REGINA TIANJIN CHAIN & BELT CO., LTD.
Xi Qing Economic Development Area,
Xiang Rui road n. 17
Tian Xiang Industrial Zone
300385 Tian Jin - China
Tel. +86 22 83961223
Fax +86 22 83961202
sales.cn@reginachain.net

ARGENTINA

REGINA INTERNATIONAL S.A.
Diagonal 190,
1788-1655 José León Suárez
Prov. Buenos Aires - Argentina
Tel. +54 11 47296667
Fax +54 11 47203210
sales.ar@reginachain.net

GERMANY

REGINA
Tel. +49 2662939196
Fax +49 2662939198
sales.de@reginachain.net

SPAIN

CADENAS REGINA ESPAÑA, S.L.
Calle Industria, 37
08120 La Llagosta - Barcelona - España
Tel. +34 93 5742838
Fax +34 93 5740735
sales.es@reginachain.net



P.D07D11e



REGINA INDUSTRIAL IS A REGISTERED TRADEMARK OF:



PERFORMANCE IN MOTION

www.regina.it

THERMOFORMING
STICKER CHAINS

THERMOFORMING STICKER CHAINS

Sticker chains are used to convey plastic film in thermoforming machines

Regina “Thermoforming sticker chains” are based on ISO 08B-2, 08A-1 and 10A-1 roller chains.

Regina manufactures exclusively in its European factories, to assure a high level of quality and reliability.

Regina can custom design sticker chains based on the combination of the following guide and attachment options



GUIDE OPTIONS

GUIDED ON CHAIN ROLLERS	GUIDED ON SADDLE	GUIDED ON EXTENDED PIN	GUIDED ON SINGLE OUTBOARD ROLLER	GUIDED ON DOUBLE OUTBOARD ROLLER

ATTACHMENT SHAPE OPTIONS


STANDARD	COINED	DEEP LINK	ASIMMETRIC	CHISEL

PRODUCT FEATURES

- Chains are pre-stretched to eliminate break in elongation and matched in pairs for trouble free machine set up
- Precise length tolerance for exact film positioning
- High performance lubrication suitable for high temperature. On request with USDA H1 food approved prelubrication
- Optimized plate hardness for improved wear resistance





Smooth tip finishing for cleaner piercing and reduced powdering

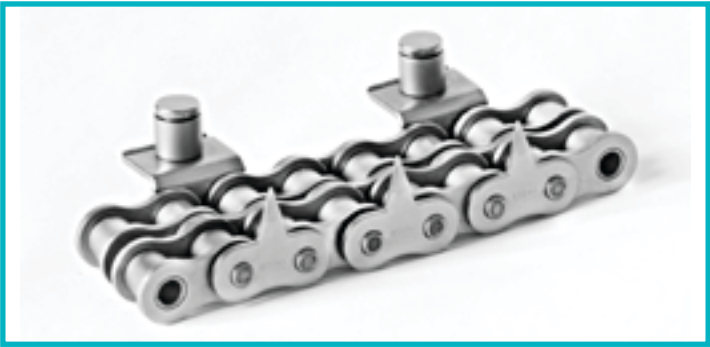


Available in nickel plated version for corrosive environment

08B-2 BASE CHAIN

GUIDED ON CHAIN ROLLER - COINED AND DEEP LINK

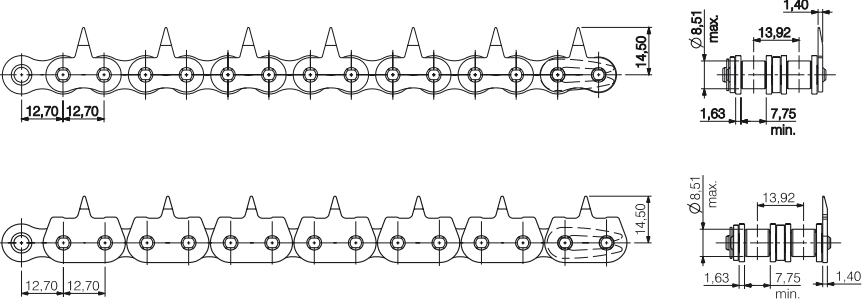

Attachment type 150





Attachment type 1140

ILLIG
TFT
style

REGINA ref.	ISO ref.	CHAIN PITCH P		ROLLER DIAMETER Dr		INSIDE WIDTH W		SPIKE ATTACHMENT TYPE	SPIKE ATTACHMENT FREQUENCY
226/903	08B-2	12,70	1/2	8,51	0,335	7,75	0,305	150	every 2nd pitch
226SR/P001	08B-2	12,70	1/2	8,51	0,335	7,75	0,305	1140	every 2nd pitch

GUIDED ON SADDLE - COINED


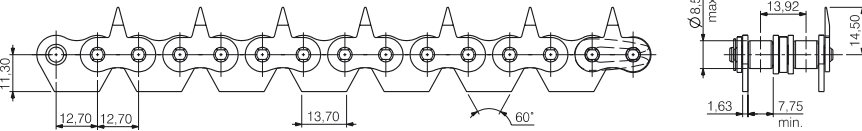


Attachment type 150

BELLAPLAST
style

REGINA ref.	ISO ref.	CHAIN PITCH P		ROLLER DIAMETER Dr		INSIDE WIDTH W		SPIKE ATTACHMENT TYPE	SPIKE ATTACHMENT FREQUENCY
226/146	08B-2	12,70	1/2	8,51	0,335	7,75	0,305	150	every 2nd pitch

GUIDED ON CHAIN ROLLER - COINED


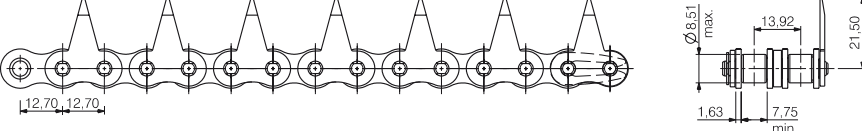


Attachment type 1010

OMV
style

REGINA ref.	ISO ref.	CHAIN PITCH P		ROLLER DIAMETER Dr		INSIDE WIDTH W		SPIKE ATTACHMENT TYPE	SPIKE ATTACHMENT FREQUENCY
226/090	08B-2	12,70	1/2	8,51	0,335	7,75	0,305	1010	every 2nd pitch

GUIDED ON SINGLE OUTBOARD ROLLER - COINED


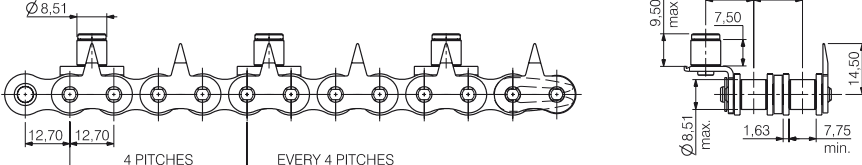


Attachment type 150

KIEFEL
GABLER
style

REGINA ref.	ISO ref.	CHAIN PITCH P		ROLLER DIAMETER Dr		INSIDE WIDTH W		SPIKE ATTACHMENT TYPE	SPIKE ATTACHMENT FREQUENCY
226/09F	08B-2	12,70	1/2	8,51	0,335	7,75	0,305	150	every 2nd pitch

GUIDED ON DOUBLE OUTBOARD ROLLER - COINED

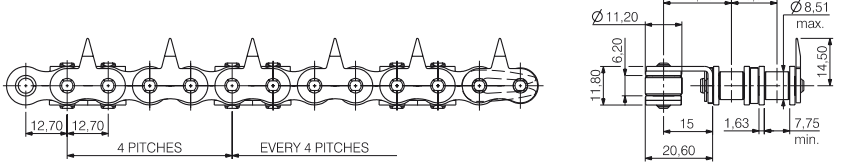




Attachment type 150

REGINA ref.	ISO ref.	CHAIN PITCH P		ROLLER DIAMETER Dr		INSIDE WIDTH W		SPIKE ATTACHMENT TYPE	SPIKE ATTACHMENT FREQUENCY
226SR/009	08B-2	12,70	1/2	8,51	0,335	7,75	0,305	150	every 2nd pitch

08A-1 / A40 BASE CHAIN

GUIDED ON EXTENDED PIN - ASYMMETRIC


Sticker attachment every 2nd pitch



Attachment type 167




IRWIN
style

Sticker attachment every 4nd pitch



REGINA ref.	ISO ref.	CHAIN PITCH P		ROLLER DIAMETER Dr		INSIDE WIDTH W		SPIKE ATTACHMENT TYPE	SPIKE ATTACHMENT FREQUENCY	ASSEMBLY SIDE
A40/0BB	08A	12,70	1/2	7,92	0,312	7,85	0,309	167	every 2nd pitch	left
A40/0BD	08A	12,70	1/2	7,92	0,312	7,85	0,309	167	every 2nd pitch	right
A40/11C	08A	12,70	1/2	7,92	0,312	7,85	0,309	167	every 4nd pitch	left
A40/11D	08A	12,70	1/2	7,92	0,312	7,85	0,309	167	every 4nd pitch	right

GUIDED ON EXTENDED PIN - ASYMMETRIC



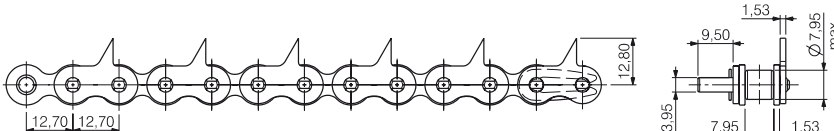


Attachment type 177

IRWIN
style

REGINA ref.	ISO ref.	CHAIN PITCH P		ROLLER DIAMETER Dr		INSIDE WIDTH W		SPIKE ATTACHMENT TYPE	SPIKE ATTACHMENT FREQUENCY	ASSEMBLY SIDE
A40/P004	08A	12,70	1/2	7,92	0,312	7,85	0,309	177	every 2nd pitch	left
A40/P003	08A	12,70	1/2	7,92	0,312	7,85	0,309	177	every 2nd pitch	right

GUIDED ON EXTENDED PIN - CHISEL



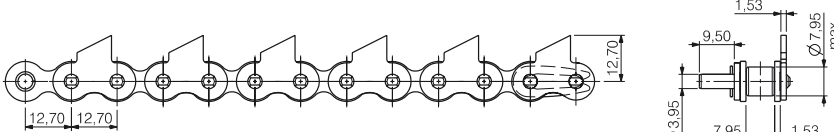


Attachment type 163

IRWIN
style

REGINA ref.	ISO ref.	CHAIN PITCH P		ROLLER DIAMETER Dr		INSIDE WIDTH W		SPIKE ATTACHMENT TYPE	SPIKE ATTACHMENT FREQUENCY	ASSEMBLY SIDE
A40/0B5	08A	12,70	1/2	7,92	0,312	7,85	0,309	163	every 2nd pitch	left
A40/0B7	08A	12,70	1/2	7,92	0,312	7,85	0,309	163	every 2nd pitch	right

GUIDED ON CHAIN ROLLER - COINED

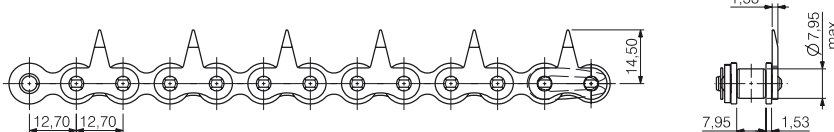

Attachment type 141

DINIEPER
style

REGINA ref.	ISO ref.	CHAIN PITCH P		ROLLER DIAMETER Dr		INSIDE WIDTH W		SPIKE ATTACHMENT TYPE	SPIKE ATTACHMENT FREQUENCY
A40/0B9	08A	12,70	1/2	7,92	0,312	7,85	0,309	141	every 2nd pitch